

PCGSXR004-Seal shell




Features:

Power tools with drive housing
small size
high reliability

Specification	
Material	304,
Insulation resistance	500V \geq 1000M Ω
Seal	1 \times 10 ⁻⁹ Pa.m ³ /s
Operating temperature	-55°C-300°C
Withstand pressure	1 MPa
Pin plating	gold (available)

Drawing

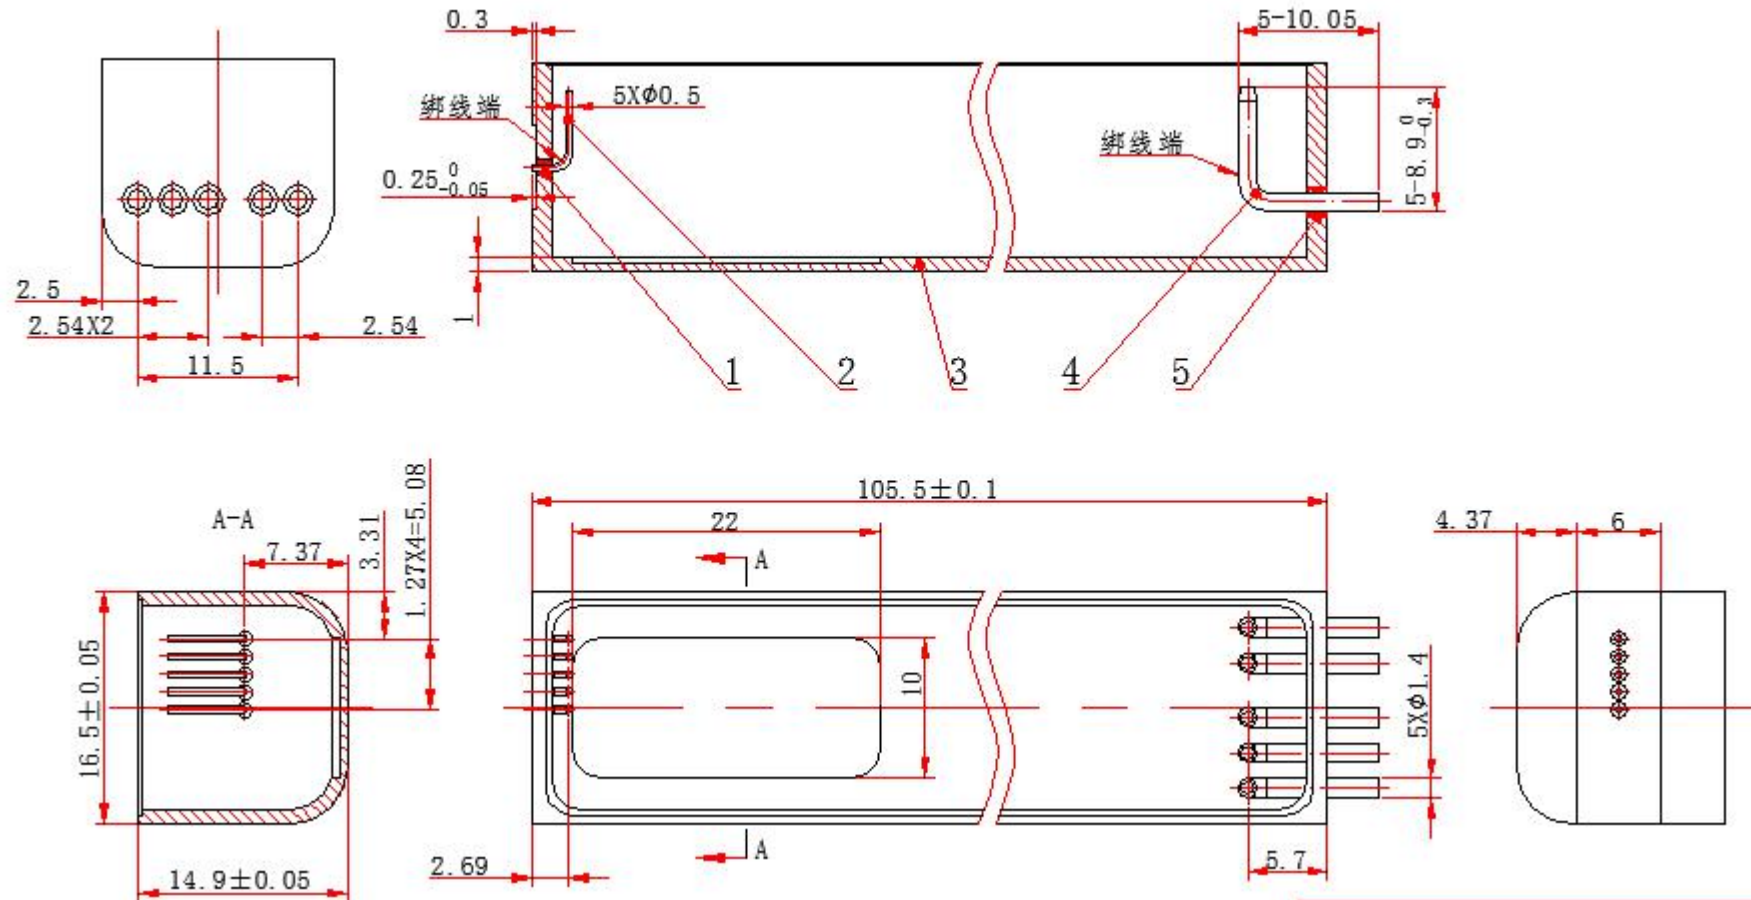

Contact us

Nanjing Wotian Technology Co.,Ltd.

Website: www.wtsensor.com

Add: 5 Wenyang Road, Binjiang Development Zone, Nanjing, 211161, China

Sales Manager: Wuzhou Lian

Email: lianwuzhou@wtsensorus.com