

## PCGSXR004-Seal shell




### Features:

Power tools with drive housing  
small size  
high reliability

Specification	
Material	304,
Insulation resistance	$500V \geq 1000M \Omega$
Seal	$1 \times 10^{-9} Pa \cdot m^3/s$
Operating temperature	$-55^{\circ}C - 300^{\circ}C$
Withstand pressure	1 MPa
Pin plating	gold (available)

Drawing

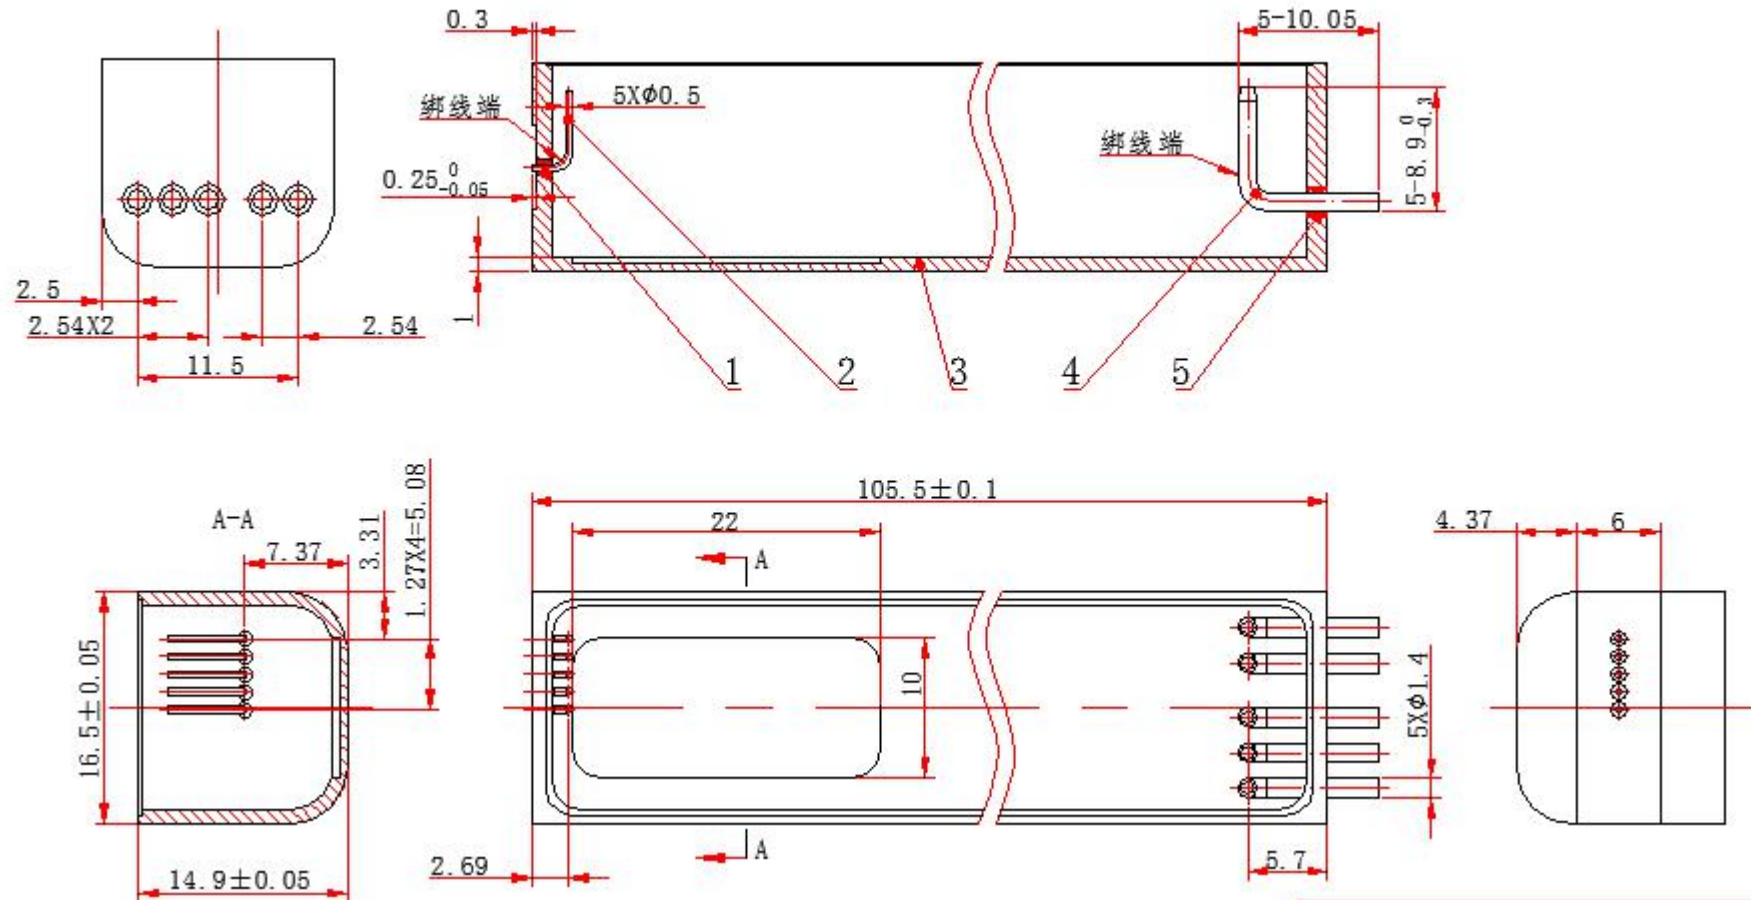

**Контакт:**

Nanjing Wotian Technology Co., Ltd.

Веб-сайт: [ru.wtsensor.com](http://ru.wtsensor.com)

Адрес: 5 Wenyong Road, Binjiang Development Zone, Nanjing, 211161, China

Электронная почта: [wtsensor@wtsensor.com](mailto:wtsensor@wtsensor.com)

Телефон: +86-18640205486

Менеджер по продажам: Эмма